

Delivery Programme

Made in Germany.
Detect the difference.



**Tailor-made solutions
for fluid filtration**



About us

Industrial Filtration covers a very wide range of tasks. We at Schwegmann Filtrations-Technik GmbH offer various solutions for the solid/liquid separation and the air filtration.

In our own sewing room we manufacture our Sieve- and Filter bags – if demanded, size and shape conform to the need of our customers.

Filter housings, filter cartridges, filter cloth, pocket filters and compact filters complete our product range.

For example, our products are used in the chemical industry, in the coatings and paint industry, in the adhesives industry or in the cosmetics and detergents industry.

In most cases, our products are used to hold back disturbing residues from a fluid or air.

Our field service will gladly assist you with the selection of the suitable filter medium.

Company Schwegmann Filtrations-Technik GmbH was founded on 01.01.2002 by Sebastian Schwegmann. However, it wasn't a start from the very beginning, because as former department of Bernd Schwegmann GmbH & Co. KG, there had already been good relations with the paint industry and German industry in general since the 1960s.

Since the spin-off we are expanding our business continuously. In November 2017, we set the next milestone in our company history with the completion of our new building in Graftschaft-Ringen.





Schwegmann Filtrations-Technik | Individual solutions for your filtration

Table of content

About us	3
-----------------------	----------

WeBaX Filtration Bags.....	5
-----------------------------------	----------

Filter Bags with a strap.....	6
Filter Bags with a strap	7-8

Filter Bags for Filter Housings.....	9
WeBaX Standard filter bags	10-12
WeBaX Silicone-free filter bags – Series 0	13
WeBaX Pleated absolute melt blown filter bags – Series 1..	14
WeBaX Absolute melt blown filter bags – Series 2	15
WeBaX Melt blown filter bags – Series 3.....	16
WeBaX Food-grade filter bags – Series 5	17
WeBaX High flow filter bags – Series 6	18
WeBaX Extended life filter bags – Series 7.....	19
WeBaX Multi-layer filter bags – Series 12	20
WeBaX Filter bags with melt blown filter core – Series 15..	21
Adapters for open filtration systems	22

Monofilament textile I Needle felts	23
Monofilament textile	24
Wire cloth	25
Needle felts.....	26
Resistance	27

Special filter designs	28
Sieve inserts I Filter inserts	29
Former filters.....	30
Screen cylinders	31
Water treatment filter Bag: WeBaX ClearPrint.....	32
Special design from wire cloth.....	33

Filter cloth	34
Filter cloth.....	35

Filter cartridges	36
Filter system Clean-Pack FK-CP	37
Pleated filter cartridges FKP	38
Absolute filter cartridges FKT-A.....	39
Meltblown filter cartridges FK-GX	40

Wound string filter cartridges FKW.....	41
Depth Filter Cartridges FK-KL	42
Active carbon filter cartridges FK-AK.....	43
Wire cloth filter cartridges FK-MK.....	44

Air filters	45
Filter pads I Filters for spray paint systems	46
Panel filters I Z-Line filters	47
Pocket filters	48
Compact filters	49

Depth filter modules I Depth filter sheets	50
Depth filter modules	51
Depth filter sheets	52

Bag filters	55
Bag filters EL.....	56
Bag filters SL	57
Bag filters TL.....	58
Bag filters ML.....	59
Bag filters PL	60
Code	62-65
Accessoires I Spare parts	66-67

Cartridge filters	68
Cartridge filters T-Series.....	69
Cartridge filters E-Series	70
Cartridge filters K-Series	71
Spare parts I Accessoires	72

Mobile Filter Trolleys	73
Mobile Filter Trolleys	74

LabFiX Laboratory Filter.....	75
LabFiX Laboratory Filter.....	76

Wedge wire filter	77
Wedge wire filter.....	78

Notes	79
--------------------	-----------



WeBaX Filtration Bags

WeBaX®

Filtration Bags by Schwegmann

WeBaX®: the future of filtration starts NOW

WeBaX® is not just a name. It is a promise to offer our customers only the best – a combination of excellent service, proven Made-in-Germany quality and a passion for high-quality filter bags.

We – stands for the Schwegmann team,

Ba – for **b**ags and the

X – for your plus in service and advice.

The new brand name brings a breath of fresh air to our communication, but the proven core benefits of our filter bags will of course remain the same:

- flexibility
- personalised solutions
- possibility for small series
- fast despatch

Prepare for the future of filtration with WeBaX® and stay one step ahead of the competition!



Filter bags with a strap

WeBaX[®]
Filtration Bags by Schwegmann



Filter Bags with a strap

Filter bags for the open filtration are used for smaller batches, if the use of mechanical filters would be uneconomical.

Filter bags from monofilament textile

The filter bags are made from monofilament textile are perfect for screening solid particles. The filter bags can be fixed below any outlet quickly, easily and without tools. The band seal in the bag opening is suitable for this. Other fastening options as cords and cable ties are available upon request.

When changing the product, the filter bags are simply replaced quickly. Thanks to the wide range of various mesh openings, the filter bags can be used flexibly in many different applications. Depending on the use, they can also be washed and therefore used multiple times.

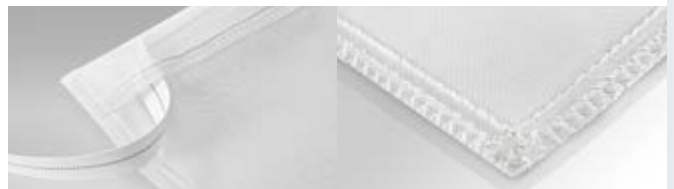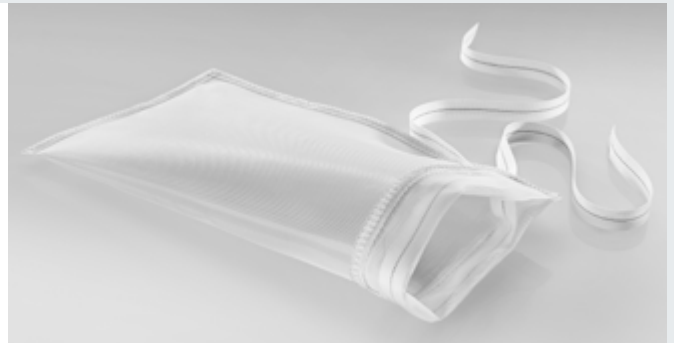

Filter Bags from needle felt

In comparison to the monofilament filter bags, the needle felt filter bags are for filtering formable particles. The filter bags can only be used once, as particles are trapped in the felt and the felt can therefore no longer be used.



Filter bags with declaration of conformity



We supply filter bags with a declaration of conformity for use in the food and feeding stuff industries. The filter bags are manufactured and packed in accordance with the regulations in EU Regulations 1935/2004 and 10/2011.



Double layer filter bags

If one layer of monofilament textile is insufficient, a supporting screen is required or if both solid and formable particles have to be screened, the double layer filter bags are the perfect choice.





Antistatic filter bags

Antistatic filter bags are used when screening materials that are electrostatically charged. Electrically conductive fibres that are integrated into the monofilament safeguard reliably against the discharge effect. The meshes no longer become blocked and the danger of electrical discharge (spark formation) reduces. The benefit when compared to metal screens is the versatile processing options provided by the Polyamide fibres.



Filter bags with round bottom | U-form | V-form

The standard screening bag is sewn with a flat bottom. We can provide a round bottom as an alternative for a larger filter surface. We can manufacture this cylindrical shape as of a diameter of 5 cm. Upon request, we can also manufacture the filter bag's bottom as a U-form or a V-form.



Sizes (flat dimensions)

	G0	G1	G2	GS
↗ W	10	15	15	Custom-made product according to your size specifications
↗ L	45	45	25	

Code

Filter medium	Mesh opening	Size
PA	250	G1

Filter medium	Code	Filter fineness / mesh opening in microns																								
		1	5	10	15	25	30	50	56	60	70	80	100	125	150	180	200	250	300	400	500	600	700	800	1000	1320
Polyamide monofilament	PA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Polyester monofilament	PES	•	•	•	•			•				•	•		•		•	•	•							
Polyamide Carbon	PAC											•	•		•		•	•			•					
Polyester needle felt	PE	•	•	•		•		•					•				•									
Polypropylene needle felt	P	•	•	•		•		•					•				•									

Other mesh openings and materials are available upon request.



Filter bags for filter housings

WeBaX[®]
Filtration Bags by Schwegmann



WeBaX Standard filter bags

The industry's first choice

Our **WeBaX Standard Filter Bags** from Schwegmann Filtrations-Technik offer you first-class filter solutions that are well established in German industry. Whether you are producing paints and varnishes, printing inks, cooling and process water, chemicals, adhesives or solvents, our They are ideal for applications in which open filtrations are no longer sufficient, whether due to higher throughputs, pressure, temperatures or aggressive media.



The advantages of our flexible filter solutions:

- High-quality screen fabrics and needle felts

Choose from six different materials and 25 mesh sizes to find the perfect filter bag for your specific needs.

- Various rings and plastic collars

Choose between galvanised steel rings, stainless steel rings, PTFE-coated stainless steel rings and plastic rings, e.g. made of Polypropylene, or a range of plastic collars for easier and safer sealing and handling.

- Safe handling

The filter bags in sizes R1/R2 with sewn-in steel rings are equipped with two loops as standard, which make them easier to handle. Do you only need one removal loop? No problem, we also offer filter bags with only one strap as an alternative. Our filters with plastic collars have integrated loops as standard for better handling.

- Customised solutions

In addition to the standard dimensions, we also offer customised filter bags in different diameters and lengths.

Material selection for your specific requirements

- **Screen cloth:** Polyamide (nylon), Polyester, Polypropylene, Polyamide Carbon, PTFE / ETFE
- **Needle felt:** Polyester, Polypropylene, Polyamide (nylon), Nomex®

WeBaX standard filter bags, made of needle felt, reliably filter deformable contaminants and guarantee a depth filter effect. Our filter bags made of sieve fabric sieve defined particle sizes on the surface and form a filter cake, which further enhances the filtration effect. In general, our WeBaX filter bags are suitable for all closed bag filter housings and can be used with all common bag filter housings.

A wide range of application areas

- Production of paints and varnishes, printing inks and other inks
- Cleaning of chemicals
- Filtration of solvents and disinfectants
- Filtration of liquids in the production of food and beverages
- Ensuring the purity of pharmaceutical products
- Water and wastewater treatment
- Cooling and process water
- Filtration of lubricants and coolants
- Filtration of cleaning agents
- Cleaning of adhesives and resins



Technical data	
Material	Monofilament textile PA = Polyamide monofilament PES = Polyester monofilament PS = Polypropylene monofilament PAC = Polyamide Carbon monofilament PTFE or ETFE = PTFE/ETFE monofilament Needle felts PE = Polyester needle felt P = Polypropylene needle felt NY = Polyamide needle felt PTFE = PTFE needle felt NX = Nomex® needle felt
	R1: 180 mm ø x 430 mm length R2: 180 mm ø x 810 mm length R5: 152 mm ø x 528 mm length (X100) R10: 105 mm ø x 230 mm length R20: 105 mm ø x 380 mm length RS: Special size
Open area	R1: 0,25 m² R2: 0,50 m² R5: 0,20 m² R10: 0,08 m² R20: 0,13 m²
Volume	R1: 9 liter R2: 18 liter R5: 7,5 liter R10: 1,4 liter R20: 2,5 liter

Technical data	
Max. differential pressure	2,5 bar
Rec. differential pressure	0,8-1,5 bar
Max. flow rates	R1: 20 m³/h R2: 40 m³/h R5: 18 m³/h R10: 6 m³/h R20: 12 m³/h
Max. operating temperature	PA = 120°C PES = 120°C PS = 80°C PAC = 120°C PTFE/ETFE = 260°C PE = 120°C P = 80°C NY = 120°C PTFE = 260°C NX = 205°C
Rings and collars	M = galvanised steel ring E = stainless steel ring K = plastic collar from Polypropylene (Standard PPP) K(PES) = plastic collar from Polyester (Standard PEP) KS = alternative plastic collar from Polypropylene (PPS) KS(PES) = alternative plastic collar from Polyester (PES) SAN = plastic collar (Santoprene) KI = plastic ring from Polypropylene (stitched inside) E(PTFE) = stainless steel ring, PTFE coated





Material Monofilament textile

Filter medium	Code	Mesh opening (µm)																																	
		1	5	10	15	25	30	40	45	50	55	56	60	70	80	100	125	150	180	200	250	300	350	375	400	500	600	700	800	900	1000	1300	1500	1800	2000
Polyamide	PA 6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Polyester	PES	•	•	•	•	•	•	•		•			•	•	•	•		•	•	•	•	•		•	•	•	•	•	•	•	•		•		•
Polypropylene	PS															•	•	•		•	•	•			•	•			•		•				•

Filtermedium	Code	Mesh opening (µm)																						
		50	80	82	105	120	145	150	160	200	205	250	245	300	400	402	420	500	510	600	850	1000	1800	
Polyamide Carbon	PAC			•	•	•	•		•			•	•			•			•	•				
PTFE monofilament	PTFE	•	•					•		•				•	•					•				
ETFE monofilament	ETFE							•				•	•				•	•		•	•	•	•	

Material needle felt

Filtermedium	Code	Mesh opening (µm)									
		0,5	1	5	10	25	50	75	100	150	200
Polyester	PE	•	•	•	•	•	•	•	•	•	•
Polypropylene	P	•	•	•	•	•	•	•	•	•	•
Polyamide	NY	•	•			•	•		•		•
PTFE needle felt	PTFE		•		•	•	•				
Nomex®	NX		•	•	•	•	•		•		•

Order Reference - Monofilament textiles and needle felts

Material	Mesh opening I filter fineness	Size of filter bag	Ring I Collar	Seam inside
PA	100	R1	K	IN
PA = Polyamide monofilament	according to table mesh opening and filter fineness	R1 = size 1	M = galvanised steel ring	IN = yes
PES = Polyester monofilament		R2 = size 2	E = stainless steel ring	plain = no
PS = Polypropylene monofilament		R10 = size 3	K = plastic collar (standard PPP)	
PAC = Polyamide Carbon monofilament		R20 = size 4	K(PES) = plastic collar (standard PEP)	
PTFEMO = PTFE monofilament		R5 = size X100	KS = altern. plastic collar (PPS)	
ETFE = ETFE monofilament		RS = Special size	KS(PES) = altern. plastic collar (PES)	
PE = Polyester needle felt			SAN = plastic collar (Santoprene®)	
P = Polypropylene needle felt			KI = plastic ring from PP (stitched inside)	
NY = Polyamide needle felt			E(PTFE) = stainless steel ring, PTFE coated	
PTFE = PTFE needle felt				
NX = Nomex® needle felt				

Due to technical developments, the data may change at any time.

WeBaX Silicone-free filter bags – Series 0



Industrial painting, cleanliness and purity are crucial for the quality of the end product. Our WeBaX Silicone-free filter bags offer you a reliable solution to ensure that painted surfaces are free of unwanted substances.

These special filter bags are designed to remove paint-wetting impairment substances (PWIS). Even small amounts of these substances can significantly impair the quality of the paint.

PWIS are substances such as silicones, oils, fats, waxes and plastic components such as PTFE and Polyethylene, which can be deposited on surfaces. They get there through the air or through direct contact of the workpiece with other objects. These unwanted substances lead to wetting problems, which result in small craters or large-area paint defects.

To ensure the highest quality standards, we test our filters for PWIS in accordance with VDMA 24364. WeBaX Silicone-free filter bags are the ideal choice to ensure the cleanliness of your components and to enable homogeneous wetting with paint.

Your advantages:

- High cleanliness:

Removal of substances that interfere with paint wetting (PWIS) for even paint application.

- Quality assurance:

Tests according to VDMA 24364 guarantee the highest standards.

- Error prevention:

Minimisation of cratering or large-scale paint defects through precise filtration.

- Wide range of applications:

Ideal for various painting processes in automotive and industrial production.

- Increased efficiency:

Improved painting quality results in less rework and cost savings.

Perfectly designed for high demands:


WeBaX Silicone-free filter bags Series 0 are the ideal solution when it comes to precise filtration and hygienic removal of contamination in painting processes.

They are particularly suitable for:

- Painting industry (e.g. cars)
- Components that require high cleanliness standards
- Other applications where PWIS-compliant solutions are required



WeBaX Pleated absolute melt blown filter bags – Series 1



In sensitive production processes, such as beverage manufacturing or fine chemicals, it is anything but easy to combine maximum filtration performance with long service life. How can retention capacity and efficiency be increased without compromising on quality or cost-effectiveness?

The answer is provided by our unique WeBaX Absolute Melt Blown Filter Bag Series 1. It is based on the proven technology of Series 2 – but the bags are additionally pleated on the inside, which significantly increases the filter area. This not only extends the service life, but also considerably increases the depth filtration effect. For you, this means fewer filter changes, higher throughput rates and finer filtration with consistent product quality.

Made from high-quality Polypropylene melt blown and supplemented by a fibre-binding protective layer, these filter bags meet the highest requirements for efficiency, purity and product safety.

Your advantages:

- Extended filter area through folding:

The pleated interior of the filter bags offers a significantly increased filter area. For longer service life, lower differential pressures and even more intensive depth filtration.

- Efficient retention of fine particles

With filtration between 1 and 25 µm, the Series 1 is ideal for removing the finest particles from liquids. Without compromising on throughput or quality.

- Protective layer on the downstream side

Prevents any fibres from being released into the filtrate, ensuring a hygienically flawless result.

- Bypass-free filtration

The fully welded construction with plastic collar ensures that no unfiltered liquid passes through.

- Chemically resistant and securely sealed

The plastic collar guarantees a tight, precise fit in the filter housing – even under demanding operating conditions.

Ideal for demanding industries and processes:

- Beverage industry (beer, wine, spirits)
- Liquid foods and pharmaceuticals
- Paint, varnish and chemical production
- Activated carbon separation
- Vinegar and syrup production
- Cleaning and washing processes

Discover the new WeBaX Series 1, a high-performance, economical filtration solution that works reliably even with demanding media and achieves greater effectiveness with more surface area. If you have any questions about this or any other filter bag, our team will be happy to advise you!

WeBaX Absolute melt blown filter bags – Series 2



The filtration of beer, wine and spirits presents many companies with significant challenges: How can consistent product quality be ensured without affecting taste and aroma? How can the finest particles be efficiently filtered out without disrupting the production process due to frequent filter changes?

This is precisely where the WeBaX Absolute Melt Blown Filter Bag Series 2 from Schwegmann comes into its own. Our filter bags provide outstanding filtration performance that ensures reliable protection even at high throughput rates and with aggressive media. With a finely graduated filtration between 1 and 25 µm and an extended service life, they reduce production interruptions to a minimum – for maximum efficiency and lower operating costs.

These WeBaX filter bags are made of a highly efficient melt-blown Polypropylene filter medium that is specially designed for challenging filtration processes. In addition, a Polypropylene protective layer on the downstream side ensures that no fibres are released into the liquids.

Your advantages:

- High-quality melt-blown microfibres

Made of Polypropylene for maximum dirt holding capacity and extended service life.

- Double protective layer:

The protective layer on the downstream side eliminates fibre release and ensures particularly precise filtration.

- Bypass-free filtration:

Thanks to the fully welded design with plastic collar, 100 % bypass-free filtration is ensured.

- Highly flexible, chemically resistant seal:

The plastic collar adapts to any filter housing and ensures a secure seal.



- Effective filtration:

The bags reliably remove solids between 1 and 25 µm in size.

- No residues:

Our WeBaX filter bags are free of any finishes, binders, resins or surface tension-altering substances.

- Hydrophobic microfibres:

The material of the filter bags requires prior wetting with an aqueous solution to achieve the best possible results.

Instructions are included with the filters.

Recommended for difficult applications

WeBaX Absolute Melt Blown filter bags Series 2 are ideal for applications where precise filtration and hygienic removal of the finest particles are required.

Such as in the:

- Beverage industry (beer, wine, spirits)
- Parts cleaning
- Paint and varnish production
- Process engineering (activated carbon separation)
- Vinegar production



WeBaX Melt blown filter bags – Series 3

The top solution for the filtration of paints and varnishes

The high-performance melt blown filter bag with a high dirt holding capacity has been specially developed for the demanding requirements of the filtration of paints and varnishes in the automotive industry. They are an outstanding solution for the removal of solids and oils.

WeBaX Melt Blown Series 3 filter bags feature a high-quality, multi-layer construction. These filter bags provide greater than 99% efficiency in the removal of solids and oils. They have an impressive dirt holding capacity of up to 250 g. The multi-layer melt blown technology guarantees excellent performance and reliability in the filtration of paints and varnishes.

Reliable filter technology for the most exacting requirements in the automotive industry

Features:

- Multi-layer meltblown filter material:

Our filter bags use a multi-layer construction made of melt-blown material, which is known for its high filtration efficiency. This material is particularly effective at separating oil and ensures that your liquids are thoroughly cleaned.

- Absolutely safe bag design:

Each filter bag is designed with a completely safe sewing technique and equipped with a welded plastic collar. This reliably prevents the formation of bypasses and ensures that no impurities escape.

- Protective layer made of spunbond material:

The protective layer made of spunbond material protects against fibre release and ensures consistent filter performance without the interference of loose fibres.

- Stable safety seams:

The safety seams of the filter bag are designed to provide high stability under pressure and flow rates. This ensures consistent performance and reliability, even under demanding conditions.

- Step-by-step and reliable cleaning:

The various layers of the meltblown filter provide a gradual and efficient cleaning of the liquid, giving the filter bags a high dirt holding capacity and a long service life.



- PWIS compliance – free of paint-wetting impairment substances:

Our filter bags are free of substances that could affect paints, ensuring that your painting results are not negatively influenced.

Your advantages at a glance:

- High filtration performance:

Multi-layer filter material ensures thorough removal of solids and oils.

- Robust construction:

Safety seams and matching plastic collars prevent bypasses and guarantee stable performance.

- Fibre-release protection:

The spunbond protective layer ensures a clean filter environment without loose fibres.

- Long service life and performance:

Step-by-step filtration and high dirt holding capacity guarantee a long service life.

Applications areas:

WeBaX Melt Blown Filter Bags Series 3 are ideal for

- **Paint and Varnish Filtration:** ensuring a high quality and consistency of your paint job.

- **Automotive Industry:** efficient removal of impurities and oils in various production processes.

WeBaX Food-grade filter bags – Series 5

Your reliable choice for hygienic filtration

In the food industry, reliable and efficient filtration is crucial to ensure product quality and hygiene. Impurities and unsafe materials can severely affect production processes. This poses a major risk to food safety.

The WeBaX food-compliant filter bag Series 5 from Schwegmann offers a reliable solution that has been specially developed for use in food processing. The filters meet the highest standards of cleanliness, efficiency and legal compliance.

Safety through stringent regulation

Our food-grade filter bags comply with the following regulations:

- EG Regulation No. 1935/2004: Materials and articles intended to come into contact with food.
- EU Regulation No. 10/2011: Plastic materials and articles intended to come into contact with food.
- EU Regulation No. 2023/2006: Good Manufacturing Practice for materials and articles intended to come into contact with food (GMP: Good Manufacturing Practice)

Each filter bag is individually packed to ensure the highest level of hygiene and safety during transport and storage.

Your advantages:

- **Food-compliant:**
Manufactured according to the strictest EU and EG requirements for materials that come into contact with food.
- **Safe packaging:**
Each filter bag is individually packaged to avoid contamination and ensure hygiene.
- **Flexibility and availability:**
Our filter bags are specially designed to meet the requirements of the food industry and offer maximum reliability.



Perfectly designed for various applications

The WeBaX food-grade filter bag Series 5 is ideal for use in food production and processing. It guarantees safe and efficient filtration in a variety of applications, such as:

- food oils
- beverages
- syrups, sugar solutions and liquid sugars
- dairy products
- sauces and dressings
- natural extracts

Other applications:

- Cosmetics ((body and skin care products, natural cosmetics)
- Pharmaceutical active ingredients
- Flavours and fragrances
- Packaging industry / printing of food packaging
- Paints and varnishes for e.g. children's toys



WeBaX High flow filter bags – Series 6

Superior flow capacity and service life



Discover a new dimension in filtration with WeBaX High Flow Series 6 filter bags from Schwegmann. Our product combines the advantages of filter bags and filter cartridges to offer you outstanding filtration properties. With up to 65%-85% more surface area than comparable filter bags, you will experience an impressive increase in performance.

Our High Flow filter bags offer a variety of advantages that will revolutionise your filtration processes:

- Increased flow rates

Reduce the size of your filter vessels by up to 50% thanks to the high flow capacity.

- Extended service life

Experience up to five times longer service life compared to conventional filter bags and reduce your maintenance and changeover costs.

- Reduced residual liquid

Our filter bags contain only 25% of the residual liquid.

- No bypasses

The plastic collar and 100% welded seams reliably eliminate bypasses.

- Top efficiency

Up to 35 times more effective than standard filter cartridges, making it ideal for demanding applications.

- Lower differential pressure

Reduce energy usage with lower differential pressure.

- Cost-effective

Benefit from an extremely cost-effective system compared to other solutions.

- Easy maintenance

The solid cylinder design enables uncomplicated and cost-effective maintenance.

The WeBaX High Flow filter bags can be easily installed in existing filter housings without the need for any modifications to the housing. The filter elements can be replaced quickly and easily, which significantly reduces your maintenance times.

Wide range of application areas:

Our WeBaX High Flow filter bags Series 6 are designed for a wide range of process applications:

- Paints and varnishes
- Inks and dispersions
- Resins
- Water and wastewater treatment
- Solvents
- Lubricants and fluids in metal processing
- Solvent- and water-based cleaners in metal washing plants
- Oil and gas extraction and processing
- Drinking water
- Beer and wine
- Cooking oils
- and much more

Bag design based on competitor housings

Before using Series 6 High Flow filter bags, please check compatibility with your housing manufacturer, housing type and year of manufacture. We are happy to assist you with this, whether you are using existing cages or require new ones. We also offer matching cages to ensure a perfect fit and maximum performance.

WeBaX Extended life filter bags – Series 7

Longer service life reduces your operating costs



With the WeBaX Extended Life Series 7 filter bag, you can offer your processes first-class filtration performance and significantly extend the service life of your filters. The reinforced material thickness ensures effective separation of gels and other contamination, reducing operating costs and increasing the efficiency of your production processes.

Our Extended Life filter bags feature a robust, fully welded construction that prevents bypasses and ensures continuous filtration. Made of Polyester or Polypropylene fibres, the filters meet strict FDA and EU guidelines for food contact. The special surface treatment almost completely eliminates fibre migration and ensures a reliable filtration.

Your advantages:

- **Increased material thickness**
Increases efficiency in the separation of gels and improves filtration performance.
- **Less waste and lower changeover costs**
Reduces your operating costs through an exceptionally long filter bag service life.
- **Robust welded construction**
Eliminates bypasses and ensures complete filtration.
- **High-quality filter materials**
Comply with all relevant FDA and EU food contact regulations.
- **Suitable plastic collars for all commercially available bag filter housings**
Adapts perfectly to the filter housing, is chemically resistant and ensures an unrivalled seal thanks to its special sealing lip. The plastic collar reinforces its sealing function as the differential pressure increases.
- **Free of PWIS (substances that interfere with paint wetting)**
Ensures trouble-free filtration.

Wide range of applications

WeBaX Extended Life filter bags are ideal for a variety of applications:

- Water treatment
- Chemicals and petrochemicals
- Paints and varnishes
- Automotive industry and metal processing
- Adhesives
- Food industry



WeBaX Multi-layer filter bags – Series 12

Optimal filtration and long service life



In numerous industries, it is crucial that filters last a long time and work efficiently in order to minimise interruptions in the production process. When filtering liquids, high throughput and extended filter life play a particularly important role in operating costs.

The WeBaX multilayer filter bag Series 12 from Schwegmann offers the ideal solution for this, as its special construction, using multiple layers of diverse materials, ensures optimal filtration performance and a long service life.

Our industrial filters consist of two, three or even more layers of needle felt of different finenesses, carefully sewn to achieve improved filtration performance. If desired, an outer protective layer made of special fabric can reliably eliminate fibre migration.

A wide range of materials for every need

- **Needle felts in standard and extended-life versions** for particularly high durability and a long service life
- **Screen fabrics** in a variety of materials to meet the requirements of a wide range of industries
- **Filter nonwovens** of all kinds to protect the interior structure or eliminate fibre migration (e.g. spunbond)
- **Melt blown** filter layers to bind even gel-like particles and oils, as well as to optimise the service life

This flexibility in the choice of materials makes it possible to tailor the filter bags exactly to your needs, in order to optimise both the throughput and the service life.

Your advantages

- Multilayer design

Two, three, four or more layers of needle felt, monofilament textile, melt blown or nonwoven media provide extended filter life and improved filtration efficiency

- Protective layer against fibre migration

Ensures clean and reliable filtration without particle emission

- Higher efficiency

Increased throughput and optimised service life ensure improved production processes

- Wide range of material options

Choose your favourite from standard or extended-life needle felts, screen fabrics, melt-blown filter media and nonwovens

For challenging filtration tasks in industry

Our WeBaX multilayer filter bags Series 12 are particularly suitable for applications where high dirt holding capacity and long filter life are required, for example:

- chemical industry
- food industry
- automotive industry

WeBaX Filter bags with melt blown filter core – Series 15

Impressive efficiency and dirt capacity

The WeBaX filter bag with a melt-blown core sets new standards in filtration technology. Equipped with a seamless microfibre cartridge insert and innovative density levels, this filter bag offers exceptional ability to remove traces of oil in process fluids. Compared to conventional Polypropylene bags, it has a four times higher dirt holding capacity, making it a superior choice for complex filtration tasks.

Features and benefits

- Seamless microfibre cartridge insert

The advanced microfibre technology with density levels ensures efficient removal of traces of oil and contaminants that other filter solutions may not be able to fully capture.

- Increased dirt holding capacity

With a dirt holding capacity four times greater than conventional Polypropylene bags, this filter bag offers extended service life and lower maintenance costs.

- Fully welded needle felt construction

The robust construction ensures high stability and durability under continuous load, without compromising filter performance.

- Special plastic collar

The specially designed plastic collar eliminates any unfiltered bypass, ensuring complete filtration and maximum efficiency.

- Versatile applications

Ideal for continuous flow applications such as e-coat and phosphate baths, automotive and paint manufacturing, as well as batch applications such as oils, cooking oils, syrups and final or polishing filtration requirements.

Range of needle felts:

- Polypropylene extended life needle felt
- Polypropylene standard needle felt (after consultation)

Choice of fineness:

1 µm, 5 µm, 10 µm, 25 µm, 50 µm, 75 µm, 100 µm



Your advantages:

- Highly efficient filtration

Effectively removes trace oil and impurities with a superior dirt holding capacity.

- Durable construction

The welded needle felt construction and the special plastic collar ensure high stability and prevent bypasses.

- Versatile

Ideal for a wide range of applications, from continuous flow processes to batch applications.

Some of the most important application areas are:

- Automotive industry
- Chemical industry
- Paint manufacturing
- Food and beverage production
- Pharmaceutical industry
- Water treatment
- Life Science
- Cosmetic products / cosmetics industry



Adapters for open filtration systems

Adapters are used in conjunction with ring filter bags to form a gravity-operated, open filter system with minimal investment costs.



Adapters can be supplied in Stainless steel (CrNiMo) and Polypropylene with a G 1½" female thread. The maximum infeed pressure is 1.5 bar.

Suitable ring filter bags

	R1	R2	R1S
Ø	18	18	18
↗ L	43	81	special length



Code

Type	Size	Material
A	1-2	S

Technical data

Type	A
Material	Stainless steel (S); Polypropylene (P)
Bag size	1 / 2 (see ring filter bags)
Maximum operating data	1.5 bar



Monofilament textile | Needle felts







Monofilament textile

We use monofilament textiles from selected suppliers to manufacture our products. The materials are subjected to continuous inspection, which ensures that high and consistent quality are maintained at all times.

The monofilament textile comprises flat and even (monofile) fibres. The values for the monofilament textile openings are defined exactly and their measurements checked. The monofilament textile is heat-set and this provides the mesh with its stability. It can hold defined particle sizes back on the textiles surface. Sieving is basically grading defined particle sizes with an effective selectivity.

We recommend monofilament textiles made of Polyester for acids and monofilament textiles made of Polyamide for bases. We can also provide Polypropylene and many other materials upon request. We recommend our Polyamide monofilament textile with carbon fibres as an antistatic option.

Our standard roll widths that we keep in stock are between 60 and 120 cm. Other widths are available upon request. We are happy to supply you with monofilament textile pieces in all shapes and sizes, cut by laser or punching.

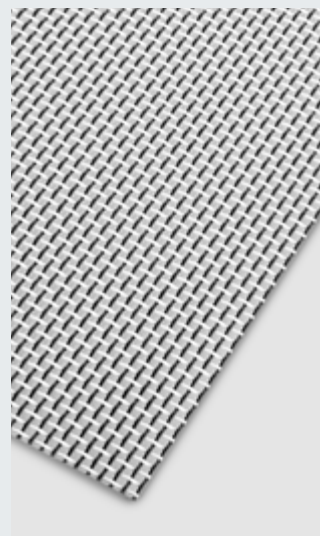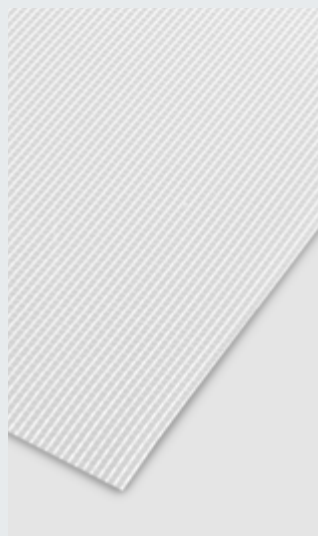

Code		
Filter medium	Mesh opening	Width of textile
PA	100	120

Filter medium	Code	Mesh opening in microns																								
		1	5	10	15	25	30	50	56	60	70	80	100	125	150	180	200	250	300	400	500	600	700	800	1000	1320
Polyamide monofilament	PA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Polyester monofilament	PES	•	•	•	•			•				•	•		•		•	•	•							
Polyamide Carbon	PAC											•	•		•		•	•			•					



Other mesh openings and materials are available upon request.

Wire cloth

The robust wire cloth is made of stainless steel, is extremely heat-resistant and has very good mechanical stability.

Metal wire cloths have the same structure and the same functions as a plastic monofilament textile. The wires of a metal wire cloth also criss-cross at right angles and alternate continuously between above and below. The result is a cloth with square mesh openings and a fixed mesh size. Particles with a defined size can be held back on its surface.

The standard roll widths are between 100 and 150 cm. Other widths are available upon request. We are happy to supply you with wire cloth pieces in all shapes and sizes, cut by laser or punching.

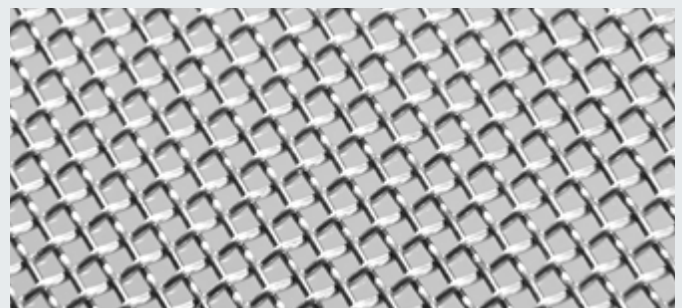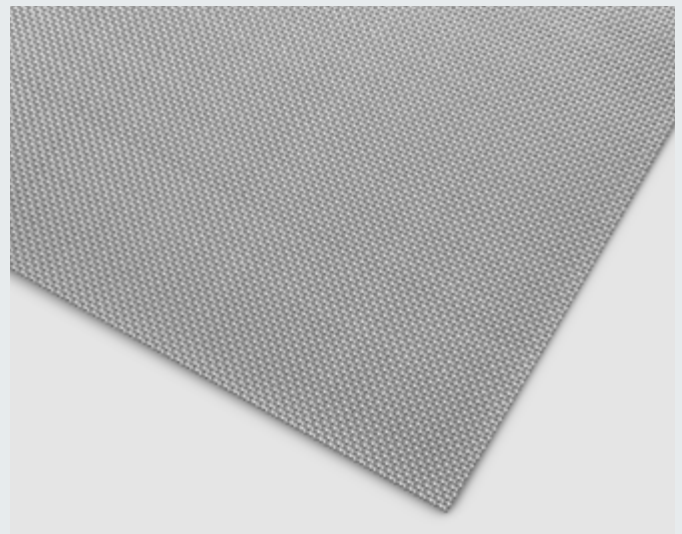

Code		
Filter medium	Mesh opening	Width of textile
E	100	100

Filter medium	Code	Mesh opening in microns																	
		25	50	60	70	80	100	125	150	180	200	250	300	400	500	600	800	1000	1200
Stainless steel	E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


Cloths made of other materials with different types of weave (e. g. plain dutch weave) or mesh openings are available upon request.



Needle felts

While deformable particles can push through a monofilament textile, they are held back in three-dimensional needle felts.

Needle felts have a three-dimensional filter structure, whereby the filter properties apply both on the surface and throughout the depth. This enables deep filtration for very large accumulations of solids and higher flow rates. The needle felt is heat-treated on the surface in order to virtually prevent fibres getting into the filtered material. The specified pore size is practically unmeasurable, a nominal filter fineness that is based on empirical values is specified here.



Code		
Filter medium	Filter fineness	Width of textile
PE	100	59

Filter medium	Code	Fineness in microns							
		1	5	10	25	50	100	200	
Polyester needle felt	PE	•	•	•	•	•	•	•	
Polypropylene needle felt	P	•	•	•	•	•	•	•	

Other finenesses and materials are available upon request.

Resistance

When using our products, pay attention to the different resistance properties of the different materials.

	Polyamide	Polyester	Polypropylene	Stainless steel
Alkalies	A/B	A/B	A	A
Acids	B/C	A/B	A	A
Alcohols	A	A	A	A
Ester	A	A	A	A
Aliphatic HC	A	A	A	A
Aromatic HC	A	B	C	A
Chlorinated HC	A	A	B	A
Oxidising agents	B/C	B/C	A	A/B/C
Oils, greases	B/C	A	A	A

Temperature

Dry	110°C	150°C	100°C	400°C
Wet	100°C	120°C	90°C	400°C

Key

resistant = A	partially resistant = B	not resistant = C
---------------	-------------------------	-------------------

The specifications are approximate values that depend on the concentration of the suspension and the duration of the filtering procedure. We are happy to provide further information on the individual chemicals.



Special filter designs



Sieve inserts | Filter inserts



Sieve inserts for open filtration made of monofilament textile.

Screen inserts are preferred where screening bags cannot provide sufficient screening surface area and where using vibrating screens or bag filters appears to be uneconomical. The eyes that are stamped into the side seam provide versatile fastening options, e.g. to hang onto a frame that has pins.



Filter inserts for open filtration provide a large filter surface area and a high solid collection capability.

Filter inserts for use in lattice boxes are used wherever waste-water etc. is to be treated visually and where a treatment plant appears uneconomical. They are mainly made of needle felt and have integrated eyes in the top seam for better fastening.

Dimensions in cm

	G3	G3S
↗ W	51	Custom-made product according to your size specifications
↗ L	57	

Dimensions in cm

	G4	G4S
↗ W	80	Custom-made product according to your size specifications
↗ L	120	
↗ H	90	

Filter medium	Code	Mesh opening in microns																									
		1	5	10	15	25	30	50	56	60	70	80	100	125	150	180	200	250	300	400	500	600	700	800	1000	1320	
Polyamide monofilament	PA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Polyester monofilament	PES	•	•	•	•			•				•	•		•		•	•	•								
Polyester needle felt	PE	•	•	•		•		•					•				•										
Polypropylene needle felt	P	•	•	•		•		•					•				•										

Other mesh openings and materials are available upon request.

Code

Filter medium	Mesh opening	Size
PA	300	G3
PE	200	G4



Former filters

Paper former filters, folding filters and funnels from monofilament textile are perfect for open filtration of small batches in laboratories or technical centres.



Paper former filters are made of solid paper and have a monofilament textile insert on the bottom. They are mainly used to screen varnishes, paints, glues, etc. The former filters are ideal for screening small quantities such as those that occur in laboratories. We can also provide holders and dispensers as accessories.



Folding filters are also made of solid paper, in which precision and standard textile is used. In contrast to paper former filters, folding filters can be produced with various mesh openings.



Funnels made of monofilament textile have a defined mesh opening and provide the user with a larger screening surface area than the paper former filters due to the range of various sizes. They can be supplied with or without a band.

Filter type	Code	Mesh opening in microns																											
		1	5	10	15	25	30	50	56	60	70	80	100	125	150	180	190	200	250	260	300	400	500	600	700	800	1000	1320	
Paper former filters	TS				•	•				•				•	•		•			•								•	
Folding filters	FS		•	•	•	•	•	•		•	•	•	•	•	•	•		•	•		•	•	•	•	•	•	•	•	
Polyamide monofilament	PA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•		•	•	•	•	•	•	•	•	
Polyester monofilament	PES	•	•	•	•			•				•	•		•			•	•		•								
Polyester needle felt	PE	•	•	•		•		•					•					•											
Polypropylene needle felt	P	•	•	•		•		•					•					•											

Other mesh openings and materials are available upon request.

Dimensions in cm		
	G5	G5S
Ø	15	Custom-made product according to your size specifications
↗ L	13	

Code		
Filter medium	Mesh opening	Size
TS	125	
FS	50	
PA	10	G5

Screen cylinder

We manufacture various designs of screen hoses, screen nozzles and screen cylinders for all known centrifugal sifting machines.

Screen hoses, screen nozzles and screen cylinders are made of monofilament textile, Polyamide, Polyester or conductive cloth with carbon fibres. The mesh opening start at 1 µm and go up to 5000 µm. A masked longitudinal seam (e.g. silicone seal), sewn in cords and labels with the mesh openings and the running direction are also possible upon request.

Dimensions in cm

Ø	11	18.5	18.5	18.5	18.5	31	31
↗ L	21	29	38.5	48.5	58	24.4	37.5

Code

Filter medium	Mesh opening	Size
PA	200	GS



Filter medium	Code	Mesh opening in microns																								
		1	5	10	15	25	30	50	56	60	70	80	100	125	150	180	200	250	300	400	500	600	700	800	1000	1320
Polyamide monofilament	PA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Polyester monofilament	PES	•	•	•	•			•				•	•		•		•	•	•							
Polyamide Carbon	PAC											•	•		•		•	•			•					

Other mesh openings and materials are available upon request.



Water treatment filter bag: WeBaX ClearPrint

Optimise your offset printing process with the highest quality filtration – made in Germany.

In the offset printing process, even the smallest impurities in the dampening water can cause significant problems – from printing defects such as streaking and tonal value fluctuations to a shortened lifespan of your machines.

The frequent need to replace filter media not only results in production interruptions, but also in unnecessarily high operating costs. In addition, many standard solutions do not meet the specific requirements of your printing processes, which further impairs efficiency and quality.

We at Schwegmann Filtrations-Technik are familiar with these challenges and offer you an innovative solution for water treatment: our filter bags WeBaX ClearPrint.

These filter bags are specially designed for the requirements of dampening water filtration in offset printing. They effectively remove impurities such as paper dust, ink residues and chemical deposits, which can significantly impair print quality.

Our WeBaX ClearPrint filter bags precisely filter the dampening water, eliminating streaking and tonal and colour fluctuations. This ensures consistently high print quality and extends the life of your printing presses.

What's more, our WeBaX ClearPrint filter bags are equipped with an innovative adapter system that allows for quick and easy integration into your existing printing system. The precisely fitting form and the use of robust materials not only guarantee a long service life, but also reliable filtration.

Flexible filtration solutions for every need

The water treatment filter bags are available in single and double layers, with and without plastic adapters. In addition to these filter bags, we also offer you the complete range of filter technology for dampening water circulation.

The choice is yours:

- Colour and oil absorbers (absorbers)
- Filter mats as cut-outs or on rolls
- Rolled filter candles, melt blown filter candles (nominal and absolute)
- Filter bags with inlet
 - 25 x 25 cm
 - 40 x 45 cm (inlet 14 x 15 cm)
 - 26 x 25 cm (inlet 6 x 4,5 cm)
 - 13 x 50 cm



Your advantages:

- **Optimised filtration:**
Remove impurities efficiently and improve the quality of your dampening water.
- **Long service life:**
Benefit from high-quality materials and precise workmanship that guarantee a long service life.
- **Easy integration:**
Integrate the WeBaX ClearPrint filter bags quickly and safely thanks to the well-thought-out adapter design.
- **Versatile applications:**
Use the filter bags for all common offset printing presses.

Designed for printing machines from:

- Heidelberg
- Koenig & Bauer
- Komori
- manroland
- Ryobi


Special design from wire cloth

We design, construct and produce moulded parts made of metal wire cloth from simple cuts to complex components for prototypes up to mass production.

The moulded parts are made of metal wire and are suitable for screening solid, liquid or gaseous substances. Furthermore, there are numerous different applications such as in a microphone or a loudspeaker.

The wire cloths that are used are normally made of stainless steel and are available in various mesh openings and weave constructions. Our range includes a wide selection of different shapes: lined or multi-layer blanks, various punching and moulded parts, screen hoses, screen cylinders and much more.


Please send us a sample or a drawing together with your inquiry.

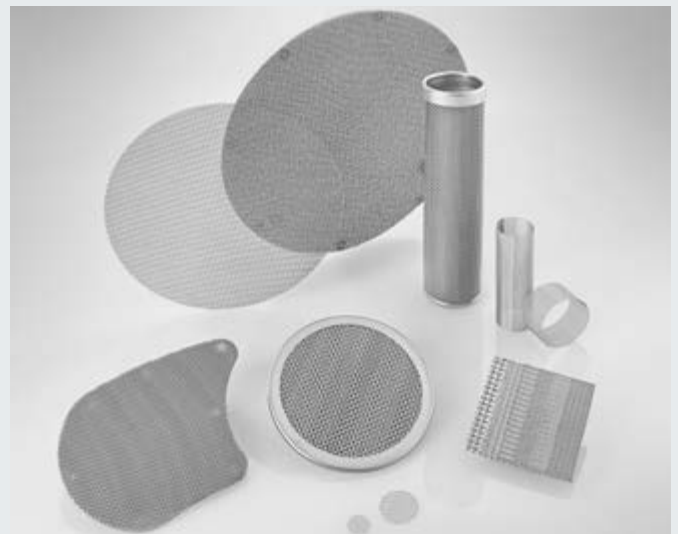

Code		
Filter medium	Mesh opening	Size
E	25	GS

Filter medium	Code	Mesh opening in microns																	
		25	50	60	70	80	100	125	150	180	200	250	300	400	500	600	800	1000	1200
Stainless steel	E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Other mesh openings and materials are available upon request.

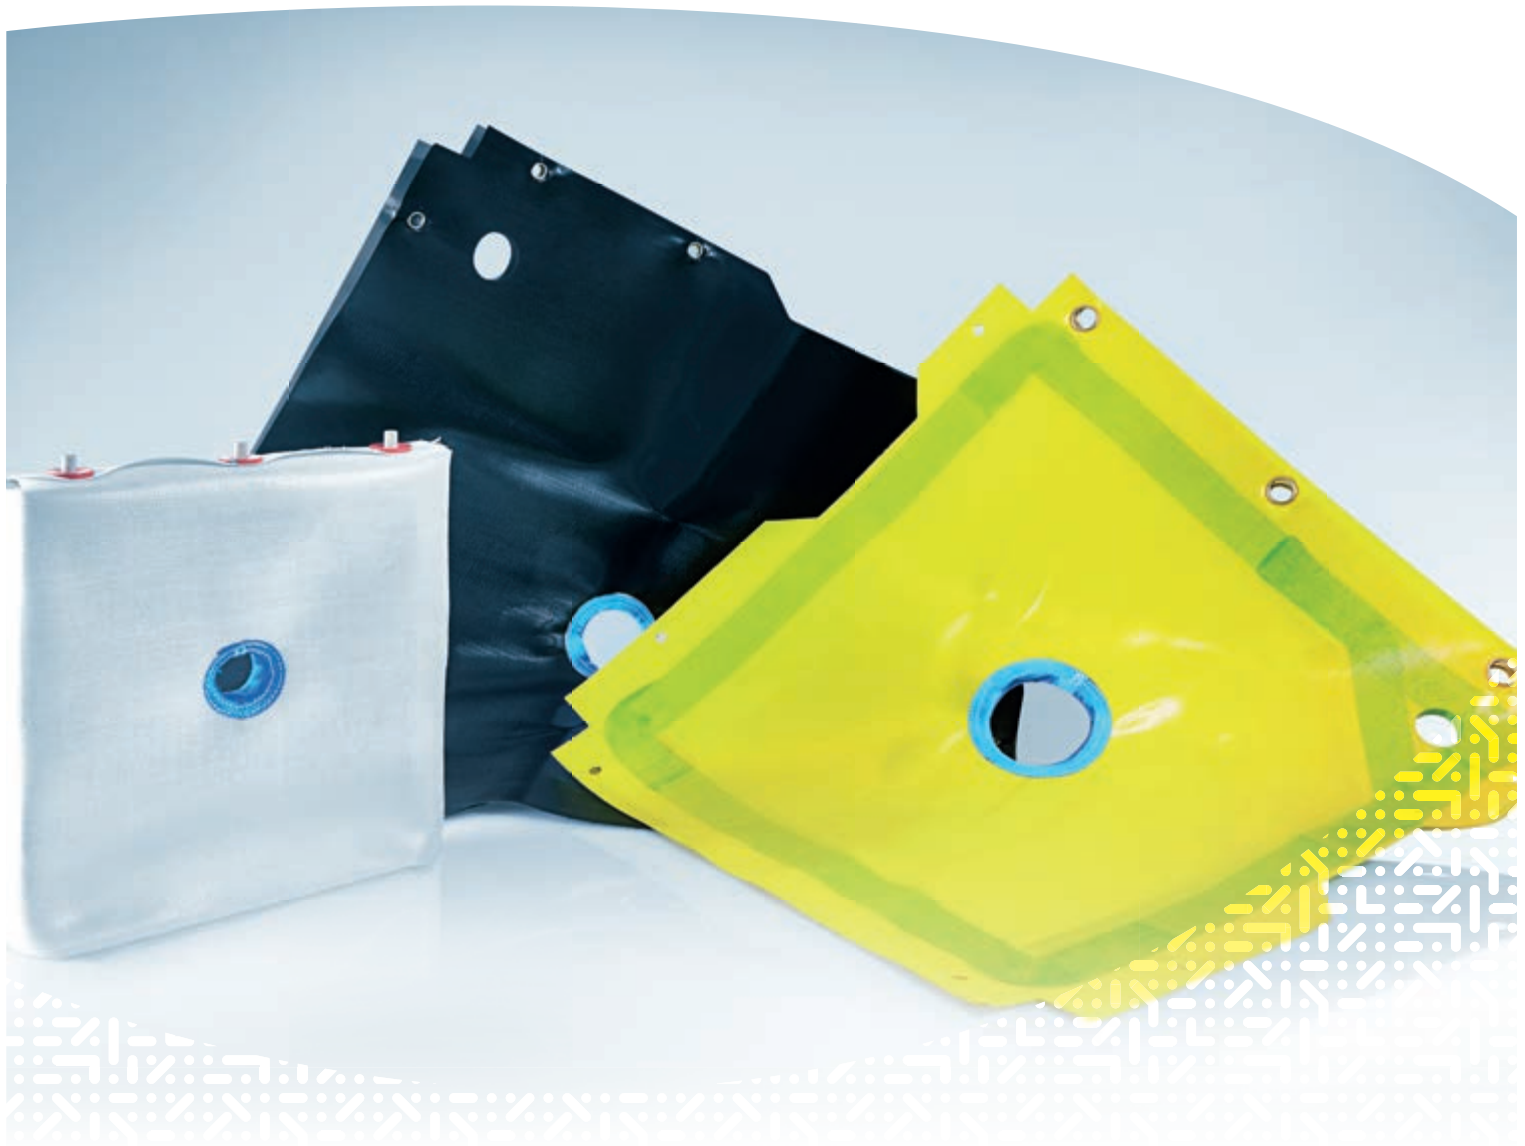

Filter cloth



Filter cloth

Filter cloths are used to separate solids and liquids in filter presses.

Our filter cloths can be manufactured in the following designs:

- Double neck filter cloth
- Overhang filter cloth
- With edge seal
- Drip-tight design for CGR filter plates

Filter cloth

The filter cloth quality, predominantly made of Polypropylene or Polyamide, is designed in accordance with the air permeability (L/dm²/min), the web type (mono-filament, multi-filament, mixed yarn) and cloth treatment (e.g. calendered surface). We will design a suitable filter cloth for optimum filtration according to the application.

Formats

We supply all common formats from 250 x 250 mm to 2000 x 2000 mm.



Benefits of our filter cloths

- Optimum filtration
- Good filter cake removal
- Long service life
- Cleanliness
- Cost effectiveness

Sample cloth

We provide you our suitable sample cloth for trials.

In order to receive this, please send us one of your current filter cloths or fill in our form with all required dimensions.

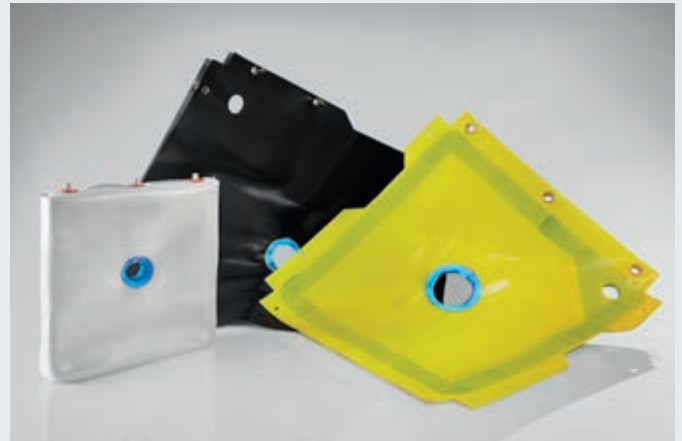

Code

Format	Filter medium	Air permeability	Design
630	P	8	D



Filter cartridges



Filter system Clean-Pack FK-CP

This filter system is perfectly suited for fast and clean filtration.

If you do not want to clean your filter housing between product changes, if you want to protect the user and the working environment from toxicity, if hygiene and cleanliness are very important, then the clean-pack filter system is the right choice.

The most common reason for using the clean packs is the elimination of the annoying cleaning effort and the associated time saving. Depending on the throughput quantity, we have the clean packs with 1, 3 or 7 filter candles in lengths 5", 10" and 20". We are also happy to offer alternative candle materials as well as suitable filter housings.

Application areas

Colour kitchens in the automotive industry, parts painting and coating systems, inks and colour production, coating production, solvent production, chemical production, filling lines.



Technical data

Length	5" 10" 20" 30"
Number of cartridges	1 3 7 pieces
Filter fineness (Micron)	0,5 1 5 10 20 30 50 75 100 150 200
Temperature	70°C
Maximum differential pressure	2,5 bar
Material top plate	Polypropylene
Material cartridge and core	Polypropylene
Protective bag	HDPE (reinforced polyethylene)

Code

Cartridge type	Number of cartridges	Length	Fineness	Version
FK-CP	7	10	1	FK-GX



Pleated filter cartridges FKP

These cartridges have a pleated surface that enables a long service life if filtration performance is high.

Applications

Food, drinks, aqueous solutions, chemicals, drinking water, pharmaceuticals, cosmetics, process water, reverse osmosis pre-filtration, printing inks, wine pre-filtration, magnetic tape dispersions, ventilation filters, oil, gas, inks.

Features (depending on the series)

- Materials: Polypropylene, Borosilicate microfibres
- Absolute filter cartridge with a filter efficiency of 99.98%
- Nominal filter cartridge with a filter efficiency of 90%
- FDA-, USP-compliant
- Sterilisation / in-line sterilisation / autoclavable



End configuration

DOE double open end	(0)
SOE 226-O-rings + bayonet / end cap	(1)
SOE 222-O-rings / fin	(2)
SOE 226-O-rings + bayonet / fin	(3)
SOE 222-O-rings / Polypropylene end cap	(4)
DOE internal O-rings	(5)
SOE internal O-ring	(6)



222-O-ring



Fin



226-O-ring
with bayonet



Polypropylene
end cap

Technical data

Length	9 ¾" 10" 20" 30" 40"
Diameter	OD: 69 mm / ID: 25.4 mm or 27.9 mm
Filter fineness (micron)	from 0.2 to 100 µm (absolute or nominal)
Maximum differential pressure	5.2 bar at 20°C
Maximum operating temperature	80°C

Code

Cartridge type	Series	Length	Fineness	Configuration	Seal
FKP	1	10	10	3	S

Absolute filter cartridges FKT-A

The FKT-A filter cartridge consist of 100% pure Polypropylene without binding agents and have a Polypropylene supporting core.



Applications

Water for dialysis, cooking oil, food, drinks, pharmaceuticals, galvanic baths, semiconductor production, chemistry, petrochemistry, varnishes, inks and generally as a pre-filter to protect submicron absolute filters.

As absolute filters, the filter cartridge have a separation degree of >99.98%. They meet FDA requirements and are free of silicone.

End configuration

DOE (standard) Polypropylene flat seals	(0)
SOE 222-O-rings / fin	(2)
SOE 226-O-rings + bayonet / fin	(3)
SOE 222-O-rings / Polypropylene end cap	(4)

Code

Cartridge type	Length	Fineness	Configuration
FKT-A	20	10	3

Adapters



Polypropylene
flat seal



222-O-ring



Fin



226-O-ring
with bayonet



Polypropylene
end cap

Technical data

Length	5" 9 3/4" 10" 20" 30" 40"
Diameter	OD: 64 mm / ID: 27 mm
Filter fineness (micron, absolute)	0.5 1 3 5 10 20 30 50 70 90 120
Throughput of a 10" cartridge (m³/h), (water)	1.9 1.0 1.1 1.4 1.6 2.3 2.6 3.0 3.0 3.0 3.0
Maximum differential pressure	4.0 bar at 25°C
Maximum operating temperature	80°C



Meltblown filter cartridges FK-GX

The FK-GX deep filter cartridges are made of pure Polypropylene microfibres that are thermally joined in the melt-blown procedure.

Applications

Water treatment, high-purity water pre-filter, cooking oils, fine chemicals, resins, reverse osmosis, DI water, seawater desalination, wine (pre-filtration), drinks, film processing, fixing baths, solvents, cosmetics, galvanic baths.

The cartridges are completely free of binding agents and comply with the FDA requirements.



Technical data

Length	5" 9 ¾" 10" 19 ½" 20" 29 ¼" 30" 39" 40"
Diameter	OD: 64 mm / ID: 28 mm
Filter fineness (micron, normal)	1 3 5 10 20 30 50 75
Throughput (l/min per 10")	7 9 15 18 20 22 25 25 (water)
Maximum differential pressure	2.5 bar at 30°C
Maximum operating temperature	80°C

Code

Cartridge type	Length	Fineness
FK-GX	10	20


Wound string filter cartridges FKW

A thread is wound around a supporting core in the wound filter cartridges. The thread and the supporting core are available in various materials.



Applications

Water treatment, seawater desalination, condensate treatment, process water, photochemicals, film processing, cooking oils, solvents, galvanic baths, greases, acids, bases, chemical processes.



Technical data

Length	5" 9 ¾" 10" 19 ½" 20" 29 ¼" 30" 39" 40"
Diameter	OD: 62 mm ID: 28 mm
Filter fineness (micron, normal)	0.5 1 3 5 10 25 50 75 100 150 200
Winding material	P = Polypropylene W = Polypropylene, washed
	H = Glass fibres B = Cotton
	PE = Polyester N = Polyamide
Supporting core material	P = Polypropylene S = Stainless steel
Maximum differential pressure	2.5 bar at 30°C
Initial differential pressure	0.1 bar
Maximum operating temperature	80°C for Polypropylene 135°C for Polyamide
	150°C for Polyester 150°C for Cotton
	400°C for Glass fibres 400°C for Stainless steel


Code

Cartridge type	Length	Winding material	Core	Fineness
FKW	10	P	P	25



Depth filter cartridges FK-KL

The temperature-resistant depth filter cartridge from acrylic fibres successfully filters impurities and opacities from liquids.



The depth filter cartridges from the FK-KL series offer you excellent filtration performance, even during sophisticated processes in your company. Through an innovative procedure, long acrylic fibre connects with phenolic resin during production. That ensures an utterly sturdy filter structure, high temperature resistance and a good dirt absorption. The filter cartridges have proven themselves when filtering highly concentrated chemicals. Our clients from the colour, paint, adhesive and chemical industries are very satisfied with the quality and nominal deposition rates of the depth filter cartridges.

Application areas

Vanishes, colours, printing inks, inks, adhesives, polymers (synthetic resins, natural resins), waxes, solvents, chemicals, emulsions, hydrocarbons, fuels, petroleum, paints, cooling water and wastewater, organic foods like ether, animal and vegetable oils, lubricants and hydraulic liquids, plastics, coatings, photo emulsions.

We recommend not to filter foods or beverages with the depth filter cartridge FK-KL.

Technical data

Length	9 ¾" 10" 19 ½" 20" 29 ¼" 30" 39" 40" 50"
Diameter	OD: 64 mm ID: 26,5 mm
Filter fineness (micron, normal)	2 5 10 25 50 75 125 150
Pressure resistance	9 bar at 20°C
	8.6 bar at 38°C
	6.2 bar at 65°C
	4.5 bar at 82°C
	1.7 bar at 121°C
Maximum differential pressure	2.5 bar
Maximum operating temperature	121°C
Rec. throughput (max.)	38 l/min per 9 ¾" cartridge length

Code

Cartridge type	Length	Fineness
FK-KL	9	75

Active carbon filter cartridges FK-AK

Active carbon filter cartridges are used when the purely mechanical filter effect is no longer sufficient for the loosened substances as they are only of a molecular size.


Applications

Water, drinking water, spirits, aqueous and organic solutions (to rectify colour impurities and odour and flavour neutralisation), dechlorination, galvanic baths (removal of organic impurities from nickel and copper baths)

You can differentiate between active carbon types according to their raw material sources (hard coal or coconut) and its delivery forms (pellets, blocks, granules or powder). The active carbon impressively adsorbs many loosened substances from fluids, such as oil, grease, pesticides, colourants and other organic bonds that can otherwise not be filtered mechanically.

Excessive chlorine or disinfected ozone react to active carbon and are rendered harmless. Odorous substances can be bound completely and can no longer dissipate. Bitter substances are adsorbed completely and cannot contaminate any food. In the galvanic area, active carbon can be used effectively against disruptive organic bonds.

Note: We always recommend rinsing active carbon filters until the fluid is visibly clean at the start.



The service life can be improved significantly by upstream filter candles with mechanical filter effects.

Technical data

Length	9 ¾" 10" 19 ½" 20" 29 ¼" 30" 39" 40"
Diameter	OD: 64.5 mm ID: 27 mm
Material	Active carbon (hard coal, coconut)
Supporting bodies and supporting cores	Polypropylene
Casing	Polyethylene, sintered
Seals:	EPDM (flat seals for DOE)
Filter fineness (micron, normal)	approx. 10 µm
Maximum operating temperature	70°C for water
Rec. throughput (max.)	300 l/h per 10" cartridge length

Code

Cartridge type	Length	Fineness
FK-AK	9	10



Wire cloth filter cartridges FK-MK

These filter cartridges made of metal wire are used when plastic filter cartridges cannot be used due to high temperatures or certain chemicals.

The metal wire filter cartridges are completely plasma-welded, free of oil and thermally degraded. The end caps and the longitudinal seams are free of glues.

PTFE flat seals are inserted in the grooves of the filter cartridges that open on both sides (DOE) as standard. Threads or adapters that are customary in the industry can be manufactured according to the housing type.

You can choose between filter finenesses of from 1 µm to 1000 µm; bear in mind that the filter surface area decreases as the filter fineness increases. There is the option of using a pleated variant to increase the filter surface area.

Applications

Hot fluids, solvents, viscous fluids, oxidants (e.g. potassium permanganate, hydrogen peroxide, nitric acid, etc.), hot steam



Technical data

Length	4 ¾" 9 ¾" 19 ½" 29 ¼" 39" 40"
Diameter	OD: 64 mm ID: 27 mm
Mesh openings (micron)	1 µm – 1000 µm
Material	Stainless steel, 1.4301
Sealing material	PTFE
Cloth surface area	approx. 500 cm ² (pleated: 1,500 cm ²)
Maximum operating temperature	up to 200°C for water
Recommended filter change	2 bar differential pressure

Code

Cartridge type	Length	Fineness
FK-MK	40	100



Air filters



Filter pads | Filters for spray paint systems

Polyester filter pads are used as pre-filters and main filters for all ventilation and air conditioning systems. Filters for spray paint systems are used to separate dry dusts and paint mists.

Filter pads

All synthetic filter pads consist of a progressively built up Polyester filter medium. The individual fibres are affixed by thermobonding or needling. Chemical bonding agents are not used. Filter pads (G2-G4) can be reused. Fine dust filter pads (M5) are intended for one-time use. Regeneration is not intended. Nine pad types with various filter classes, thicknesses and flow rates are available. The filter pads are available on the roll or in pieces.

Filters for spray paint systems

Glass fibre filter pads consist of a glass fibre web and are free of silicone and substances that damage paint. The Dust-Stop filter pads are equipped with an antibacterial dust binding agent to separate dry dusts. Paint-Stop filter pads are used especially to protect against paint deposits in ventilation ducts, as well as on motors and fans. All glass fibre filter pads are approved for the automotive industry.



Panel filters I Z-Line filters

Panel filters are the alternative to filter pads. They can be manufactured simply or pleated as Z-Line filter cells for increased dust storage capacity.

Panel filters


Panel filters can be equipped with glass fibre or synthetic media. A wide range of frame materials such as moisture-resistant cardboard, galvanised metal or plastic are available for them.

Z-line filters

Z-line filters are different due to the filter medium being folded in a Z shape. This provides these elements with a service life that is 2.5 times as long.

Applications

Pre-filtration for air conditioning and ventilation devices or systems that must remove coarse dusts highly efficiently.

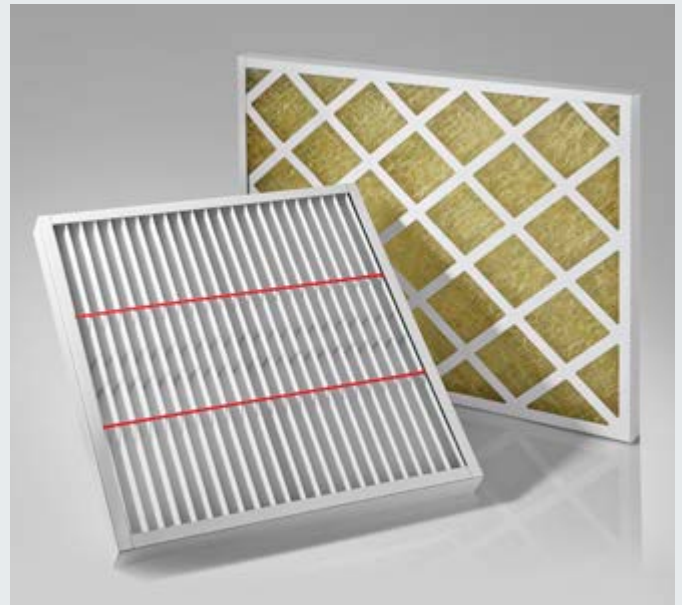



Pocket filters

For filtration in all types of ventilation and air conditioning systems and devices.

The individual pockets are welded conically and are connected so that they are leak-tight using the single frame structure. Frames made of galvanised steel or plastic are used as standard. The frame depth is 25 mm (optional: 20 mm). We can also provide an optional PP flat seal. If the filter media are multi-layer Polypropylene melt-blown synthetic filter media or glass fibre filter media, the individual seams are sealed using hot-melt adhesive to prevent dust penetration.

Applications

Air conditioning systems, offices, warehouses, hospitals, computer centres, telephone exchanges, factories for the optical, fine mechanical, electronic, pharmaceutical and chemical industries. Furthermore, they are used as pre-filters for filters for suspended particles and as pre-filters in varnish and paint spraying plants.



Code				
Pocket filters	Width x height x depth	Filter class	Number of pockets	Frame
TF	592 x 592 x 600	F7	6	M

Compact filters

Powerful fine dust compact filters for all types of ventilation and air conditioning systems.

Thanks to the mini-pleat design, very narrow pleat gaps and therefore a very large filter surface area can be created and implemented. The filters can also be used in pocket filters and installed both horizontally and vertically; they are corrosion-free and moisture-resistant at up to 100% relative air humidity. All compact filters in this range can be fully incinerated. You can obtain all common filter classes between M6 and H13 from us.

Applications

Main filter stage in air conditioning, ventilation and turbine systems, fine dust filtration in all types of ventilation and air conditioning systems, e.g. in offices, hospitals, computer centres or airport, intake or exhaust filters for the photographic, electrical, pharmaceutical and food industries, microfiltering in process technology, pre-filter for clean room systems and filters for suspended particles.



Code		
Compact filters	Width x height x depth	Filter class
CF	592 x 592 x 292	F9



Depth filter modules and Depth filter sheets

Depth filter modules

Filtration made easy: with our revolutionary filter modules

You are sure to be familiar with the problem only too well: in day-to-day practice, efficient and flexible filtration solutions are indispensable. Manual and time-consuming filtration processes? You can spare yourself all that from now on! Schwegmann Filtrations-Technik presents you with an innovative solution: our practical filter modules!

The filter modules are circle segments made of depth filter sheets, which are attached lenticularly to the drainage body. Several of these lenses are arranged on top of each other and connected by a grid bushing made of Polypropylene. Sealing rings between the lenses reliably eliminate the penetration of particles.

Flexible customisation of your filtration system

The filter modules offer the unique advantage of flexible customisation: the number of modules in your system can be designed variably. This allows you to easily expand or reduce the filtration area as needed. The modules work exclusively in a closed system without a flow, which makes filtration even more efficient and safe. In addition, the filter modules can be regenerated, making them a long-term and sustainable investment for your company.

Special adaptation options

Our filter modules are customisable and can be made with fewer than the standard 16 lenses per unit. For high-volume debris, spacers are built into individual lenses, reducing the number of lenses and increasing efficiency.

Wide range of application areas

- Beverage industry
- Pharmaceutical industry
- Chemical industry
- Cosmetics industry
- Biotechnology

Our filter modules are the perfect solution wherever economical and efficient filtration is required. They combine the advantages of depth filtration with a closed system that eliminates air ingress.





Depth filter sheets

The innovation in filtration technology



Our depth filter sheets are a three-dimensional depth filter made of adsorbents with an impressively large inner surface. Imagine the adsorbents as a complex network of chambers and channels of different lengths in which impurities are efficiently trapped. In contrast to conventional sieve filtration, the depth filter sheet significantly increases the total filtration area, which considerably increases the amount of filtered solution.

Filtration mechanism: triple protection for your processes

Three different types of filtration interact during the filtration process through the depth filter sheet. These mechanisms work together to ensure an outstanding result:

1. Mechanical filtration

Foreign bodies and particles that are larger than the pores of the filter sheet remain mechanically on the surface of the sheet and are effectively retained.

2. Electrostatic adsorption

This is a weak molecular interaction, known as „van der Waals forces“, that occurs between the particles in the solution and the material of the filter sheet. This means that smaller particles are also captured inside the sheet, in the chambers and channels.

3. Electrokinetic adsorption

This mechanism is based on the so-called zeta potential. The filter sheet is positively charged by a special modification of the polyelectrolytes. This positive charge ensures that nega-

tively charged dirt particles, microorganisms and viruses in suspension fluids are efficiently captured – even particles that are ten times smaller than the pore size of the filter sheet.

Wide range of possible uses and formats

Depth filter sheets are available in the formats 20x20, 40x40 and 60x61.4 cm. Other dimensions are also available based on specific customer requirements, such as round sheets or sheets with special hole patterns.

Your advantages:

- Maximum filtration area

The large inner surface of the filter sheet allows a higher volume of filtered solution.

- Multiple filtration mechanisms

Mechanical, electrostatic and electrokinetic adsorption work together for the best filtration results.

- Efficient particle binding

Effective capture of particles, microorganisms and viruses, even at the smallest sizes.

- Flexibility

Available in different formats and can be customised to your specific requirements on request.

Application areas:

Chemical industry, Food and beverage production, Pharmaceutical industry, Water treatment, Life science, Cosmetic products / cosmetics industry

[illegible]



Notizen

54



Bag filters



Bag filters EL

Cost-effective filtration in stainless steel

The EL bag filter housing from Schwegmann Filtration Technology is an impressive, economical solution for filtration processes with moderate pressures of up to 6 bar. Developed for anyone who wants to use durable stainless steel technology without making a large investment.

Made from high-quality stainless steel (1.4301), the housing combines corrosion resistance with solid workmanship – ideal for daily use in a wide range of industrial applications. Even if your processes do not currently require stainless steel, the EL housing offers the investment security of tomorrow today. With its user-friendly V-clamp closure, the filter bag can be replaced quickly and easily – saving time and reducing operating costs.

The EL series offers an entry point into the world of stainless steel housings at a price that can compete with carbon steel designs – while offering significantly better corrosion resistance and a longer service life.

Whether in the chemical, cosmetics, food or pharmaceutical industries, the EL filter housing meets the highest standards of safety, efficiency and ease of use. It is also valued in general industry for its robust construction and practical features. Of course, the housing can be optimally combined with our WeBaX filter bags from series 1 to 15. This allows you to exploit its full potential.



Your advantages:

- Side inlet for improved flow

Optimises the flow in the housing and minimises overflow when opening – for safe and clean operation.

- Greater efficiency through easy maintenance

Thanks to the tool-free lid closure, filter replacement is quick, safe and effortless.

- Various container sizes

Available for filter bags in sizes 1 (R1), 2 (R2), 3 (R10) and 4 (R20) – with matching support basket (pressure-absorbing basket) included in delivery

Areas of application:

filtration of solvents and reagents, protective filtration for plants and process fluids

Technical data

Type	EL			
Bag size	1	2	10	20 (see ring filter bags)
Maximum operating data (bar)	6	6	9	9
Maximum throughput (m ³ /h)	20	40	6	12
Material	Stainless steel 1.4571			
Connections	Size 1 and 2:		2" threads – DN50 (M)	
	Size 10:		1" threads – DN25 (M) or 1½" thread – DN40 (M)	
	Size 20:		1½" threads – DN40 (M)	



Coding on pages 62 – 63

Bag filters SL

Strong, economical and well designed

With the SL Bag Filter Housing Filtrations-Technik Schwegmann offers a reliable solution for a wide range of industrial applications. Efficient, hygienic and absolutely practical.

The robust stainless steel housing is in the mid-price segment and impresses with its well-thought-out design: a side inlet with a displacement cover prevents unfiltered liquid from overflowing. This makes changing the filter bag not only clean, but also particularly convenient.

Whether in the chemical, cosmetics, food, pharmaceutical or general industry sectors, the SL Bag Filter Housing meets the highest standards of safety, efficiency and ease of use. It can, of course, also be optimally combined with our WeBaX filter bags from series 1 to 15, which have been specially developed for demanding applications.



Your advantages:

- Side inlet for better flow

Optimises the flow in the housing and minimises overflow when opening – for safe and clean operation.

- Greater efficiency through easy maintenance

Thanks to the tool-free lid closure, filter changes are quick, safe and effortless.

- Flexible use

Available for filter bags in sizes 1 (R1), 2 (R2), 3 (R10) and 4 (R20) – with restrainer basket (pressure-absorbing basket) and selectable connections (sockets, flanges and optional Tri-Clamp or milk pipe).

- High-quality materials for demanding processes

Manufactured from stainless steel AISI 304 (1.4301), AISI 316 (1.4401) or AISI 316L (1.4404) for temperatures up to 200°C and pressures up to 16 bar. All housings are manufactured in accordance with Article 4 (3) PED 2014/68/EU. For fluid group 1, CE approval is mandatory depending on the design. Optionally, all housings can also be manufactured in accordance with ATEX.

- Hygienic design

Ground, electropolished surfaces make the SL Bag Filter Housing ideal for use in the food and pharmaceutical industries.

Typical areas of application:

Filtration of solvents and reagents, Sterile filtration and water treatment, liquid media such as liquid sugar, juices or milk, Protective filtration for plants and process fluids

Technical data

Type	SL			
Bag size	1	2	10	20 (see ring filter bags)
Maximum operating data (bar)	10	10	16	16
Maximum throughput (m³/h)	20	40	6	12
Material	Stainless steel 1.4408, 1.4571			
Connections	Size 1 and 2:		DN50 or DN80 flange (F)	
	Size 10 and 20:		1½" threads – DN40 (M)	



Coding on pages 62 – 63



Bag filter TL

The premium solution for precise liquid filtration

When processes demand maximum safety, efficiency and consistency, our TL bag filter housing is the first choice. Manufactured from high-quality precision castings and designed for demanding continuous operation, the TL housing sets new standards in terms of performance and ease of use. The top inlet ensures optimised flow through the lid, minimises space requirements and reduces product losses. At the same time, the design allows for easy and clean filter bag replacement – for greater efficiency in your operation. Thanks to the unique double weld design and a reliable seal directly above the lid, filtration remains not only safe but also completely bypass-free. Our WeBaX Standard filter bags and all other series complement the TL housing perfectly – for maximum filtration depth, extended service life and high process reliability.



Your advantage:

- Flexible connection options

Thanks to a ¼" threaded connection, measuring devices, vents or compressed air connections can be integrated quickly and easily.

- Maximum corrosion resistance

The housing is made of stainless steel, ensuring long-term reliability.

- Easy cleaning and maintenance

The smooth, bead-blasted inner surface and the minimised number of weld seams make cleaning particularly easy and hygienic.

- High-performance design for extreme conditions

The TL bag filter housing is specially designed for processes that are too demanding for conventional bag filters.

- Closure system as required

Available with either hinged eye bolts or T-bolts.

Areas of application:

Chemical and pharmaceutical industries, food and beverage processing, cosmetics manufacturing, production of paints, varnishes and inks, municipal wastewater treatment, industrial wastewater treatment, automotive industry

Technical data

Type	TL
Bag size	1 2 (see ring filter bags)
Maximum operating data (bar)	10 10
Maximum throughput (m³/h)	20 40
Material	Stainless steel 1.4408, 1.4571
Connections	DN50 flange (F)



Coding on pages 64 – 65

Bag filters ML

Multi bag filter housing made of stainless steel – more profitability and safety for filtration

For extremely sophisticated filtration processes, the multi bag filter housing from Schwegmann Filtrations-Technik is an excellent choice. It is available in different models. Depending on the size there is room for four, six, eight or twelve individual filter bags in the filter bag housing. This allows for maximum flow rates of 100 to 300m³/h.

The bag filter housing is a pressure vessel made of stainless steel that fits four, six, eight or twelve ring filter bags. The filter housing is made of a vertical, cylindrical shell with a foldable cover. The stainless-steel cover is securely closed with eye bolts and ring nuts. Thanks to its spring-loaded swivel device, it can be handled comfortably. Liquids enter the housing via the lateral inlet into the filter bags and exit filtered in the lower housing base. We gladly deliver the multi bag filter housing with a quick lock to your company.

Scopes of Application

Automotive industry, foods and beverages, chemical handling processes, paints, inks, resins, and coatings, electronics, petrochemistry, municipal wastewater treatment, industrials wastewater treatment, paper and tissue, pharmaceutical industry, lubricants, liquids for metalworking, solvents



Your Advantages

- filter surface increases
- significantly longer downtimes in production possible
- achievement of higher flow rates
- optimisation of product safety and quality
- lower setup costs due to less interruptions for the exchange of bag filters
- ideal for batch processes with high pollutant loads
- user-friendly and cost-effective alternative in complex filter processes
- versatile applications in your company thanks to the low height the housing
- quick and comfortable exchange of the filter bags
- the setup of ladders or runways for filter changes is completely omitted
- the lateral inlet and outlet on the housing allows for quick and complete emptying

Technical data

Type	ML
Bag size	4-2 6-2 8-2 12-2
Maximum operating data (bar)	10 10 10 10
Maximum throughput (m³/h)	100 150 200 300
Material	Stainless steel
Connections	DN100 DN150 DN200 DN250



Bag filters PL

The special design features is the one-piece base body made of glass fibre reinforced Polypropylene or PVDF for high corrosion resistance.

Plastic bag filter housings are free of metal parts that are at risk of corrosion. The glass fibre reinforced propylene or PVDF housings are used when filtering very aggressive fluids.

Function

Bag filters comprise three components: the filter housing, the pressure absorption basket and the filter bag. Filtration is carried out from inside to outside. The fluid to be filtered (suspension) enters the filter via the inlet, flows through the filter bag that is reinforced by the pressure absorption basket and exits through the floor outlet. A displacer can be used to reduce the residual contamination quantity. The solids that are in the bag can be disposed of easily, as the bag retains only a small amount of residual fluid thanks to its low tare volume.

Advantages and uses

The integrated clamping flange enables reliable floor attachment. The bag filter is opened manually. No special tools are required. There are two floor connections on opposite sides and they can also be used as drains or product outlets. The product outlet can therefore be placed on the same side as



the product inlet or on the opposite side of the bag filter. This makes installation significantly easier. The connections are provided as threads or a flanges. The inner housing is made easier to clean thanks to the base body's one-piece design.

Technical data

Type	PL		
Bag size	1	I 2	(see ring filter bags)
Maximum operating data (bar)	10	I 10	(7 bar for the PVDF housing)
Maximum throughput (m ³ /h)	12	I 24	
Material	Polypropylene (PVDF also possible for size 2)		
Connections	2" threads – DN50 (M) I DN50 flange (F)		

Code

Device type	Number of bags	Size	Material	Pressure	Connection	Connection type
PL	1	1	P	10	DN50	F



Code EL

Code					
Modell	No. of filter bags	Size of filter bags	Material	Pressure	Connection size
EL	1	1	S	10	DN50
EL = Economy	1 = 1 bag	1 = Size R1	S = Stainless steel AISI 304	6 = 6 bar	1 = 1"
		2 = Size R2		9 = 9 bar	1,5 = 1,5"
		10 = Size R10			2 = 2"
		20 = Size R20			

Code SL

Code					
Modell	No. of filter bags	Size of filter bags	Material	Pressure	Connection size
SL	1	2	S	10	DN50
SL = Side inlet	1 = 1 bag	1 = Size R1	S = Stainless steel AISI 304	10 = 10 bar	1 = 1"
		2 = Size R2	P = Stainless steel AISI 316	16 = 16 bar	1,5 = 1,5"
		10 = Size R10	PL = Stainless steel AISI 316L		2 = 2"
	2 = 2 bags	20 = Size R20	H = Hastelloy		3 = 3"
					DN15
					DN20
					DN25
					DN32
					DN40
					DN50
					DN65
					DN80
					DN100

Connection type	Drain	Flowtype	Surface	Gasket	Execution
M	O	1	A	1	0
M = BSP thread inside (muff)	V = drain	1 = Type 1	A = Sandblasting glass beads	1 = NBR	0 = Standard
N = BSP thread outside (nipple)	0 = without			2 = EPDM	
				3 = FPM	
				4 = PTFE	
				5 = SILICONE	
				6 = PTFE/FPM	

Connection type	Drain	Flowtype	Surface	Gasket	Execution
F	V	1	A	3	0
M = BSP thread inside (muff)	V = drain	1 = Type 1	A = Sandblasting glass beads	1 = NBR	0 = Standard
N = BSP thread outside (nipple)	0 = without	2 = Type 2	B = Electro polishing	2 = EPDM	1 = CE PED
F = Flange		3 = Type 3	C = Mechanical polishing	3 = FPM	2 = ATEX + CE
TC = TriClamp		4 = Type 4	D = Electro and mechanical polishing	4 = PTFE	3 = Custom
CL = Camlock				5 = SILICONE	
MR = Milk pipe				6 = PTFE/FPM	



Code TL

Code					
Modell	No. of filter bags	Size of filter bags	Material	Pressure	Connection size
TL	1	2	S	10	DN50
TL = Top inlet	1 = 1 bag	1 = Size R1	S = Stainless steel AISI 304	10 = 10 bar	1 = 1"
	2 = 2 bags	2 = Size R2	P = Stainless steel AISI 316		1,5 = 1,5"
			PL = Stainless steel AISI 316L		2 = 2"
			H = Hastelloy		3 = 3"
					DN50

Code ML

Code					
Modell	No. of filter bags	Size of filter bags	Material	Pressure	Connection size
ML	4	2	S	10	DN50
ML = Multi housing	4 = 4 bags	1 = Size R1	S = Stainless steel AISI 304	10 = 10 bar	DN50
	6 = 6 bags	2 = Size R2	P = Stainless steel AISI 316	16 = 16 bar	DN65
	8 = 8 bags		PL = Stainless steel AISI 316L		DN80
	12 = 12 bags		H = Hastelloy		DN100
	24 = 24 bags				DN150
					DN200
					DN250

Connection type	Drain	Flowtype	Surface	Gasket	Execution
F	V	1	A	3	0
M = BSP thread inside (muff)	V = drain	1 = Type 1	A = Sandblasting glass beads	1 = NBR	0 = Standard
N = BSP thread outside (nipple)	0 = without	2 = Type 2	B = Electro polishing	2 = EPDM	1 = CE PED
F = Flange		3 = Type 3	C = Mechanical polishing	3 = FPM	2 = ATEX + CE
TC = TriClamp		4 = Type 4	D = Electro and mechanical polishing	4 = PTFE	3 = Custom
CL = Camlock				5 = SILICONE	
MR = Milk pipe				6 = PTFE/FPM	

Connection type	Drain	Flowtype	Surface	Gasket	Closure	Execution
F	V	1	A	3	1	0
F = Flange	V = drain	1 = Type 1	A = Sandblasting glass beads	1 = NBR	1 = Spring	0 = Standard
TC = TriClamp	0 = without	2 = Type 2	B = Electro polishing	2 = EPDM	2 = Davit	1 = CE PED
CL = Camlock		3 = Type 3	C = Mechanical polishing	3 = FPM	3 = Quick closure	2 = ATEX + CE
MR = Milk pipe		4 = Type 4	D = Electro and mechanical polishing	4 = PTFE		3 = Custom
		5 = Type 5		5 = SILI- CONE		
		6 = Type 6				
		7 = Type 7				
		8 = Type 8				
		9 = Type 9				



Accessoires

To improve your processes in the production we offer useful accessoires.



Leg assembly

We offer legs as an accessory for all bag filter types if inline or wall mounting is not an option.



Mounting bracket

The mounting bracket is used for mounting on a wall.



Bag fixing ring

The bag fixing ring ensures that the filter bag sits correctly in the housing and prevents it floating due to back-ups. This also prevents the filter bag breaking.



Magnetic separator

Magnetic separators are a combination of bag retainers with bar magnets. This relieves the filter bags of magnetic particles significantly and therefore increases their service life. The magnetic separators are available in sizes 1 and 2, and can be provided with 1 or 2 bar magnets each.



Evacuation balloon

A evacuation balloon can be used to reduce the residual contamination quantity in the bag filter to a minimum and therefore to make changing the bag easier. The stainless steel displacers are pressure-resistant up to 16 bar and available in sizes 1 and 2.



Mesh strainers

The mesh strainers are available in four different sizes to fit the housings. They are made completely of stainless steel and available with mesh openings of 25, 50, 100, 150, 250, 400 and 800 μm .



Pressure gauge

Indicates the pressure present in the bag filter in bar. Many housings can also be supplied with differential pressure gauges upon request.



Venting valve

Used to vent the bag filter before opening. Automatic Venting valves can also be supplied upon request.



Pressure gauge with venting unit

The pressure gauge with venting unit ensures reliable pressure monitoring in pipelines and vessels

Spare parts

We offer a wide range of spare parts for our bag filter housings.



Gaskets

Gaskets are wear parts and must be replaced regularly. Available materials: NBR, EPDM, FPM, FEP, coated FPM and silicone.



Bag hold-down rings

The bag hold-down ring ensures that the filter bag fits perfectly in the housing. It is included in the scope of delivery.



Restrainer basket

Robust, electropolished restrainer baskets made out of perforated sheet metal enable filter bags to be used up to a differential pressure of 3.5 bar.



Lock screw

This lock screw is used if neither a pressure gauge nor a venting valve are connected.



Lifting device

The lifting device enables the pressure absorption basket to be removed safely and easily when changing the filter bag. It is supplied as standard but is also available as a spare part for all bag filter types.



Cartridge filters



Cartridge filters T-Series

Cartridge filters in the T range are made of high quality stainless steel and can be supplied for 1, 3, 6, 11, 19, 37 and 73 filter cartridge in lengths of 9 ¾" to 40".



The individual cartridge filters in the T range consist of a head and a sump, and are opened and closed using a tri clamp ring. The housing's sump is mechanically polished to ensure better cleaning. The inlet and outlet (1" threads) are arranged opposite each other in the housing head. The housings have a drain in the base (BSP 3/8"). The seal is provided by an NBR O-ring seal. The sealing rings can also be supplied in FPM and EPDM as an accessory. There are four different versions of the housing for the DOE and SOE filter cartridge types.

Multi cartridge filters in the T range can be supplied as stainless steel versions (1.4571; 1.4408) or made of special materials such as HASTELLOY for 3 to 73 standard filter cartridges. Depending on the housing type, the filters are supplied with flat or domed lids, with flap lug screws or segment bracket screws, with a loose lid or a lifting and pivoting lid (hand wheel or hydraulic), with a side inlet and with a central base outlet.

The container seal is provided by an NBR seal in the lid area. The sealing rings can also be supplied in different materials such as FPM and EPDM as an accessory. The filters have a drain valve in the container lid and a drain above the perforated base plate.

Technical data*

T-	1-10	1-20	1-30	1-40	3-10	3-20	3-30	3-40
Maximum throughput (m³/h)	2.4	4.8	4.8	4.8	4.5	9	13.5	18
Permissible operating conditions (bar/°C)	20 / 121				16 / 160			
Volume (litres)	1.8	3.2	4.4	5.8	9.2	14.7	20.1	25.6
Weight (kg)	3.9	4.5	5.1	5.7	31	35	40	46
Inlet/outlet	1" thread (ISO 228-1)				1½" thread (ISO 228-1)			
Drain	3/8" thread (ISO 228-1)				2 x ½" thread (ISO 228-1)			
Venting valve	None				2 x ¼" thread (ISO 228-1)			
Cartridge filter material	Stainless steel 1.4408, 1.4571				Stainless steel 1.4408, 1.4571			
Gasket material	NBR O-ring				NBR O-ring			
Cartridge length (")	9¾, 10	19½, 20	29¾, 30	39, 40	9¾, 10	19½, 20	29¾, 30	39, 40
Number of cartridges	1	1	1	1	3	3	3	3

*non-binding specifications

Technical data for housing sizes 6, 11, 19, 37 and 73 is available upon request.

Code

Type	Number of cartridge	Length	Material	Connection	Cartridge type	Drain
T	1	10	S	1	0	E



Cartridge filters E-Series

Stainless steel cartridge filters are of a light stainless steel design and can be supplied for 1, 5, 12 and 22 DOE filter cartridges in lengths of 5" to 40".



The single version comprises a head and a sump, which can be screwed together using a locking nut. The inlet and outlet ($\frac{3}{4}$ " or 1" threads) are arranged opposite each other in the housing head. The seal is provided by an NBR O-ring seal (EPDM or FPM upon request). The housing can be drained via a $\frac{3}{8}$ " thread on the base. A mounting console for wall mounting can be supplied as an accessory.

The 5, 12 and 22 versions are standing versions or versions supplied with a base frame. The housings are closed using a V clip. The seal is provided by an NBR O-ring seal. FPM seals can also be supplied.

The inlet and outlet are located in the lower container area. A $\frac{1}{2}$ " thread is also installed there, in order to enable the contamination and filter spaces to be drained. In order to ensure that the filter cartridges are mounted securely, they are mounted on centring bars using a retainer plate via seal caps with springs. The container lids are equipped with a $\frac{1}{4}$ " BSP thread to install a pressure gauge or a venting valve.

Technical data*

E-	1-5	1-9	1-10	1-20	1-30	1-40	5-9	5-20	5-30	5-40
Maximum throughput (m ³ /h)	1.1	2.4	2.4	4.8	4.8	4.8	8.4	16.8	25.2	33.6
Permissible operating conditions (bar/°C)	17 / 121						10 / 121			
Volume (litres)	0.7	1.51	1.54	2.98	4.42	5.87	14	23	31	38
Weight (kg)	2.5	3.28	3.29	3.82	4.34	4.87	13	16	19	22
Inlet/outlet	1" thread (ISO 228-1), $\frac{3}{4}$ " thread (ISO 228-1)						2" BSP thread			
Drain	$\frac{3}{8}$ " thread (ISO 228-1)						2 x $\frac{1}{2}$ " BSP thread			
Venting valve	None						$\frac{1}{4}$ " BSP thread			
Cartridge filter material	Stainless steel, 1.4408, 1.4571						Stainless steel, 1.4301			
Gasket material	NBR O-ring						NBR O-ring			
Cartridge length (")	5	9 $\frac{3}{4}$	10	20	30	40	9 $\frac{3}{4}$ / 10	19 $\frac{1}{2}$ / 20	29 $\frac{3}{4}$ / 30	39 / 40
Number of cartridges	1	1	1	1	1	1	5	5	5	5

*non-binding specifications

Technical data for housing sizes 12 and 22 is available upon request.

Code

Type	Number of cartridge	Length	Material	Connection	Drain
E	1	20	S	1	E

Cartridge filters K-Series

Plastic cartridge filters are single cartridge filters for standards filter cartridges that open on both sides.



The plastic filter housings are available in two housing diameters („S“ version, 12.2 cm and „L“ version, 18.5 cm) and three lengths (5", 9" and 20").

The housing head is made of Polypropylene and has an inlet and an outlet in 3/8" BSP, 3/4" BSP, 1" BSP or 1 1/2" BSP which are arranged opposite each other in the filter housing's head. The housing is therefore easy to install on the piping.

The „S“ version's sump can either be made of Polypropylene or can be a transparent sump (SAN). The „L“ version is made entirely of Polypropylene.

There is an NBR O-ring seal between the housing head and the sump. FPM seals are also available as an alternative. All housings can be supplied with a venting valve (add „E“).



Technical data*

K-	1-5-S-P-3/8 1-5-S-S-3/8	1-9-S-P 1-9-S-S	1-20-S-P	1-9-L-P-1,5-E	1-20-L-P-1,5-E
Maximum operating conditions (bar/°C)	8/50				
Filter connections (N1/N2) BSP female thread (")	3/8	3/8, 3/4	3/4, 1	1 1/2	1 1/2
Filter cartridge length (")	5	9 3/4	20	9 3/4	20
Filter head material	Polypropylene (P)				
Filter sump material	Polypropylene (P)	Polypropylene (P)	Polypropylene (P)	Polypropylene (P)	Polypropylene (P)
	SAN (S)	SAN (S)	-	-	-
O-ring gasket material	NBR				
Venting valve	Optional (add „E“)			ja	
Wrench	S-K-P-S			S-K-P-L	
Mounting bracket	BK-K-S-S			BK-K-S-L	

*non-binding specifications

Code

Type	Number of cartridges	Length	Cartridge diameter	Material	Connection	Venting value
K	1	20	S	P	1	E



Spare parts | Accessoires

We offer original spare parts and accessories for all cartridge filter housings.

Mounting brackets and wrench

We offer a wall mounting bracket and a wrench for all plastic cartridge filters. Wall mounting is carried out via the housing head so that the sump can be removed, the cartridge disposed of and reinstalled. You can use the wrench to loosen the sump easily.



Gaskets

Gaskets are spare parts and must be replaced regularly. Available materials: NBR, EPDM, FPM, FEP, coated FPM and silicone.





Mobile Filter Trolleys



Mobile Filter Trolleys

Flexibly and easily usable in different locations

3-in-1: compactly filter, suck, and pump liquids

The mobile filtration systems provide the separation of foreign and dirt particles as well as the rinse after reparations, modifications or during the operation of your machines. During all of this, our mobile filter trolleys are comfortably and safely handled. The big plus for you: shorter machine downtimes and optimisation of the complete production utilisation. The high quality and first-class filtration of our mobile suction and filter trolleys have already convinced many customers.



All benefits of the mobile filter trolleys by Schwegmann:

- possible applications in different areas of productions
- a modular construction for maximum flexibility
- components coordinated with your specifications (filter housing, connections, insulation, pressure difference indicator, pump)
- Fast and uncomplicated exchange of the filter bags without special tools
- Filtration from the inside to the outside, residues remain in the filter bag
- Shortening of the machine downtime
- Individual setting of the grade of filtration
- Cost-efficient filtration
- Perfectly coordinated pump capacity
- Developed and produced in Germany with long-standing rules of thumb

Our movable unit with pump and bag filter reliably filters:

- Lacquer
- Paint
- Ink
- Solvents
- Adhesives
- Detergents
- Cosmetics
- Liquid chemicals of all kinds
- Beverages
- And many more

Depending on the requirements you can choose between the following systems for mobile filtration:

- Switch bag filter
- Row bag filter
- Double bag filter
- Duplex bag filter
- Compressed air-driven pump filter trolley
- One-step or two-step fine filtering system
- Multi-step candle filter station

We put great emphasis on flexibility and individuality in our filtration solutions at Schwegmann. Our filter trolleys, too, have already proven themselves in many different industries, such as the coatings and paints industry, the chemical industry, cleaning industry and cosmetics industry, as well as the adhesives industry.





LabFiX Laboratory Filter



LabFiX Laboratory Filter



The innovation for the laboratory: quickly filter lacquers, paints and primers

You surely know this problem all too well: The microfiltration of highly viscous lacquers by close filtration is a time-consuming and complex procedure in the daily laboratory practice in the chemical sector. Manually filtering lacquers? From now on, you can save it! Schwegmann Filtrations-Technik exclusively presents you a real problem-solver: The innovative laboratory filter by the Thierry GmbH!

Industrial coatings, automobile paints, coating materials, oils, stains, primers, glues and other liquids can quickly be filtered with the LabFix. Simple and comfortable with the help of compressed air. The excellent result will convince you. An investment for your laboratory that pays off within the first use and constantly optimizes your process sequences. A laboratory filter in best quality – developed in Germany by experienced experts!

How does filtering lacquer with the LabFix work?

Filtering lacquer and paint in no time: Thanks to the integrated clamp, every sieve cloth can be clamped quickly. As soon as the chemical funnel is inside the device, it is closed airtight with the help of the lid and the mounting fastener. Now you only need to add compressed air and the filtration process is completed.

What amounts of lacquer is the Thierry Laboratory Filter suitable for?

The LabFix was primarily developed for the use in a professional lacquer lab. Amounts in the range of <200 g to 25 kg can quickly be filtered without a problem. Suitable for every kind of sieve cloth (like Polyamide monofilament textile (Nylon or wire cloth) and every mesh opening (from 10 µm to 200 µm).

With LabFix you can:

- quickly and precisely filter even the smallest and highly viscous amounts of lacquer,
- optimize your processes in the lab,
- use sieve cloth cuts as well as paper funnel sieves for filtration,
- save valuable resources and cleaning expenses,
- use mesh openings equivalent to production,
- do without stirring and tapping during the filtration process,
- create products that set new standards.

Scopes

Industrial coatings, automobile paints, coating materials / paints, oils, stains, primers, glues, other chemicals

Suitable for mesh openings from 1 µm to 100 µm (1 µm, 5 µm, 10 µm, 15 µm, 20 µm, 25 µm, 30 µm, 40 µm, 50 µm, 56 µm, 60 µm, 70 µm, 80 µm & 100 µm).



Wedge wire filter



Wedge wire filter

Environmentally friendly filtration of viscous media



Discover the wedge wire filter, the optimal solution for filtering viscous media in industrial and food applications. These self-cleaning filter systems offer a sustainable alternative to conventional filter elements by completely avoiding the use of disposable filter media, thus significantly minimising the consumption of resources.

Thanks to their robust and stable construction, edge-split filter systems are designed for continuous operation. They are characterised by high differential pressure resistance and a maximum operating temperature of up to 200°C. With flow rates of up to 70 m³/h, they can easily handle almost all low- and high-viscosity liquids.

How does the wedge wire filter work?

Filtration in the wedge wire filter takes place from the outside in through the cylindrical wedge wire, where the solids collect on the outside. A geared motor ensures that the wedge wire rotates continuously. The scraper removes the filter cake from the surface, eliminating the need for the disposal of conventional filter cartridges.

The removed solids collect in the lower part of the filter and can be easily removed from the housing in three ways:

- Manually by opening a ball valve
- Automatically via a time-controlled valve or
- Using an electronic control system with differential pressure monitoring that controls a drain valve

The AS50 wedge wire filter is specially designed for industrial applications. It saves you the otherwise frequent opening and cleaning of the filter housing. With a maximum flow rate of up to 3.5 m³/h, it offers a reliable and efficient solution for the filtration of viscous media.

The AS50 model consists of the following parts:

1. filter housing and head
2. cylindrical slotted tubular element or perforated plate element
3. scraper basket with wiper
4. geared motor

The filter element can be conveniently removed from below, which makes handling easier.

In addition to the standard wedge wire filter with motor, models with a hand crank are also available. You can also order the wedge wire filter from us with ATEX and food approval.

Examples of application areas:

Chocolate and cocoa mass, Marzipan, Coffee extract, Yeast, Paints and varnishes, Emulsion paints, Printing inks, Adhesives, Tar products, Solvents, Gear oil, rolling oils, rapeseed oil, Emulsions, Plasticisers, Polyurethane, Cooling lubricants

[illegible]

